



TYPICAL MOTOR PERFORMANCE DATA

Model: MEGP00302D2TBL

Serie: IEC Graphene

Issued Date	11/14/2022	Doc. #	382-R0
Issued By	LD	Issued Rev	0

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
40	30	2	3540	200L	230/380/460	60	3	96.5/55.9/48.2
Enclosure	IP	Ins. Class	S.F.	Duty	Nom. Eff.	IEC Design	kVA Code	Ambient Temp. (°C)
TEFC	55	F (*)	1.15	S1	IE2-91.7	N	-	40

* Inverter Duty

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	40	30	46.1	93.3	91.7
¾ Load	30	22.5	35.3	93.3	89.6
½ Load	20	15	25.4	92.7	83.7
¼ Load	10	7.5	16.9	89.9	64.9
No Load			13.5		36.0
Locked Rotor			338.4		0.4

Torque				Rotor Inertia
Full Load (N-m)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	(Kg-m²)
80.9	203.4	202.2	334.0	0.18302

Safe Stall Time(s) Cold / Hot	Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (kg)
		DE	NDE	
2 Cold or 1 Hot	-	6312/C3	6212/C3	245

*Bearings are the only recommended spare part(s).

Included Accessories:

PTC Thermistor

All characteristics are average expected values.

Engineering		Doc. Written By		Doc.# / Rev	MEGP00302D2TBL
Engr. Date		Doc. Approved By		Doc. Issued	



Issued Date	11/14/2022	Doc. #	382-R0
Issued By	LD	Issued Rev	0


SPEED TORQUE/CURRENT CURVE

Model: MEGP00302D2TBL

Serie: IEC Graphene

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
40	30	2	3540	200L	230/380/460	60	3	96.5/55.9/48.2
Enclosure	IP	Ins. Class	S.F.	Duty	Nom. Eff.	IEC Design	kVA Code	Ambient Temp. (°C)
TEFC	55	F (*)	1.15	S1	IE2-91.7	N	-	40
Locked Rotor Amps	Rotor Inertia (Kg-m2)	Torque				Pull Up (%)	Break Down (%)	
		Full Load (N-m)	Locked Rotor (%)					
338.4	0.18302	80.9	203.4		202.2		334.0	

Current vs Slip Curve and Torque vs Slip Curve

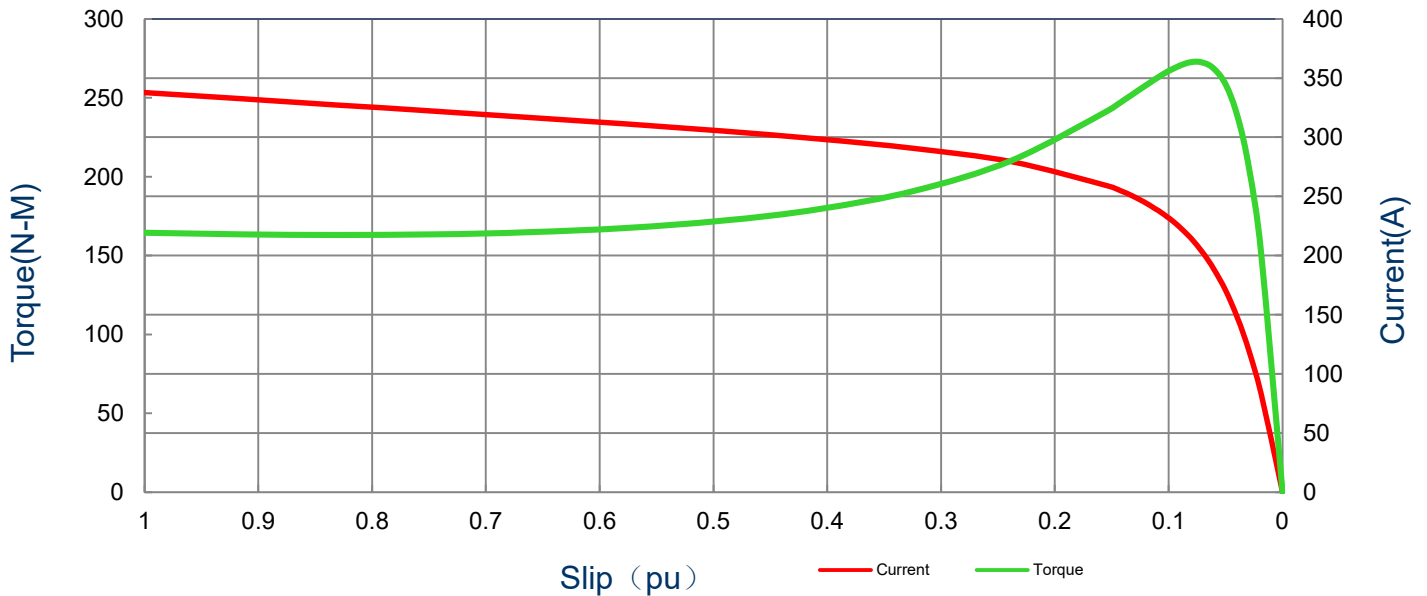

All characteristics are average expected values.

Engineering		Doc. Written By		Doc.# / Rev	MEGP00302D2TBL
Engr. Date		Doc. Approved By		Doc. Issued	

Issued Date	11/14/2022	Doc. #	382-R0
Issued By	LD	Issued Rev	0


Motor Connection Diagram

Model: MEGP00302D2TBL

Serie: IEC Graphene


HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
40	30	2	3540	200L	230/380/460	60	3	96.5/55.9/48.2
Enclosure	IP	Ins. Class	S.F.	Duty	Nom. Eff.	IEC Design	kVA Code	Ambient Temp. (°C)
TEFC	55	F (*)	1.15	S1	IE2-91.7	N	-	40

12 Leads Connection Diagram

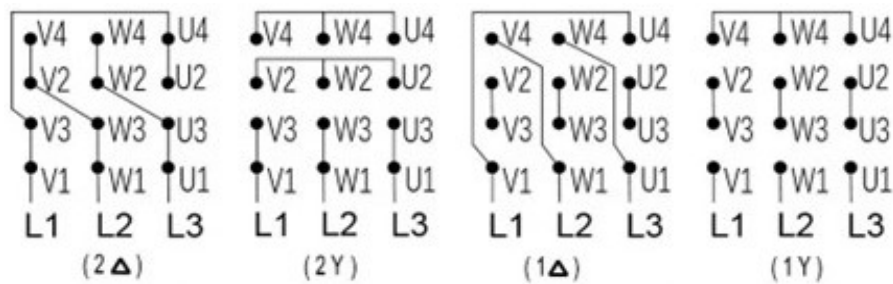




Y- Only Start

PTC Diagram



All characteristics are average expected values.

Engineering		Doc. Written By		Doc.# / Rev	MEGP00302D2TBL
Engr. Date		Doc. Approved By		Doc. Issued	

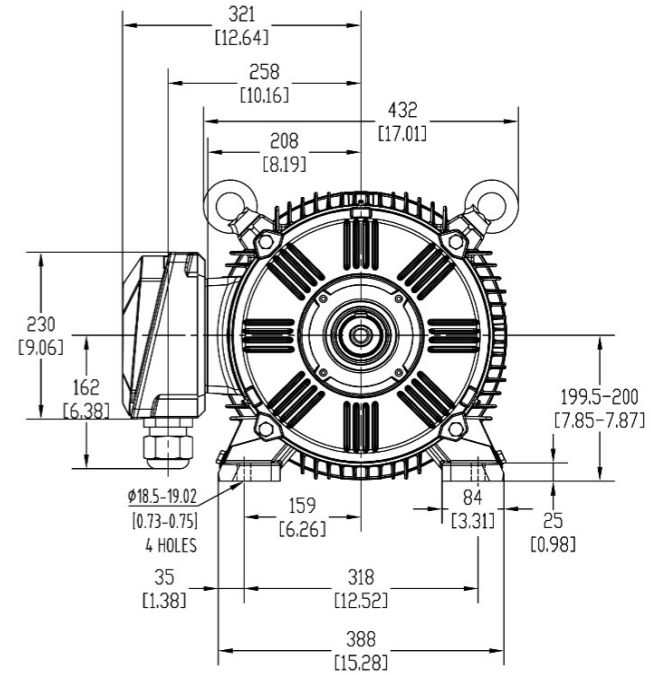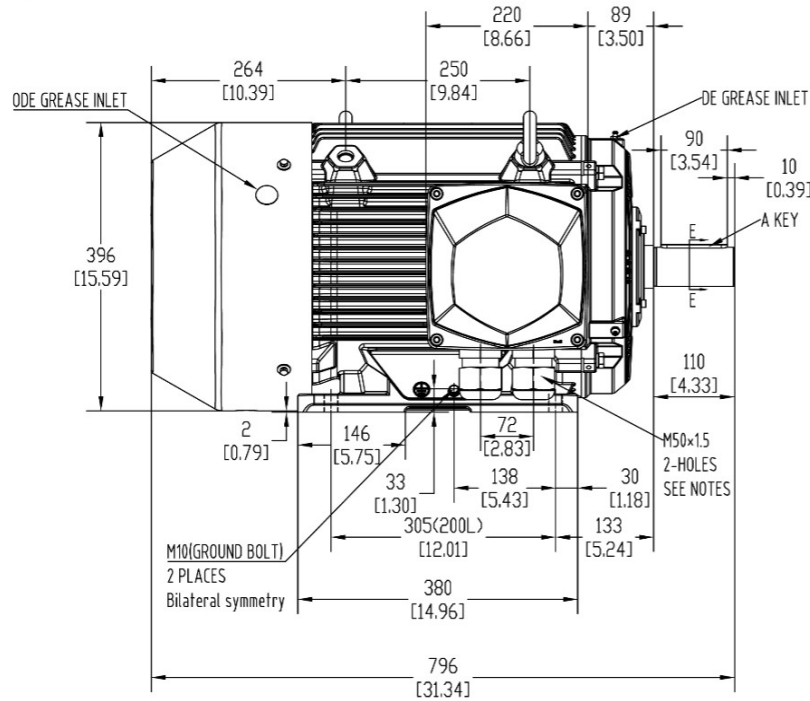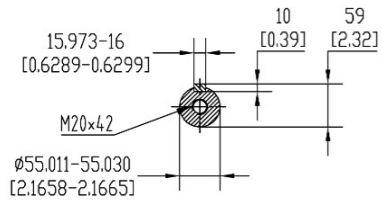

Units: mm (in)		PROPRIETARY INFORMATION We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authorization is strictly forbidden. Offenders will be held liable for payment of damages.	Notes:		
ROTATION FROM DE			1. MAIN CONDUIT BOX MAY BE ROTATED IN 90 DEGREE INCREMENTS		
CCW	CW		2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION		
			AVAILABLE ONLY BY CONNECTION CHANGE.		
	X				
TASHIDA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE				PRELIMINARY	
DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED				X CERTIFIED	
<h1>Tashida</h1>		TOTALLY ENCLOSED FAN COOLED HORIZONTAL FOOT MOUNTED 3 PHASE INDUCTION MOTOR		Drawing #: MEGP00302D2TBL	
				Rev. Date: 11/14/2022 Rev. #: 0	
		Standard: IEC-60034		Mount.: IMB3	
		Frame	200L	LHS	Per.: LD