



TYPICAL MOTOR PERFORMANCE DATA

Model: MEGP00376D2TBL

Serie: IEC Graphene

Issued Date	11/14/2022	Doc. #	382-R0
Issued By	LD	Issued Rev	0

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
50	37	6	1182	250M	230/380/460	60	3	125.8/72.8/62.9
Enclosure	IP	Ins. Class	S.F.	Duty	Nom. Eff.	IEC Design	kVA Code	Ambient Temp. (°C)
TEFC	55	F (*)	1.15	S1	IE2-93.0	N	-	40

* Inverter Duty

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	50	37	59.2	93.5	87.7
¾ Load	37.5	27.75	46.2	93.6	84.2
½ Load	25	18.5	34.4	93.0	75.8
¼ Load	12.5	9.25	25.0	90.2	53.8
No Load			21.5		27.6
Locked Rotor			503.2		0.3

Torque				Rotor Inertia
Full Load (N-m)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	(Kg-m²)
298.9	286.5	222.5	303.3	1.2763

Safe Stall Time(s) Cold / Hot	Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (kg)
		DE	NDE	
22.2/9.0	-	6314/C3	6313/C3	400

*Bearings are the only recommended spare part(s).

Included Accessories:

PTC Thermistor

All characteristics are average expected values.

Engineering		Doc. Written By		Doc.# / Rev	MEGP00376D2TBL
Engr. Date		Doc. Approved By		Doc. Issued	



Issued Date	11/14/2022	Doc. #	382-R0
Issued By	LD	Issued Rev	0


SPEED TORQUE/CURRENT CURVE

Model: MEGP00376D2TBL

Serie: IEC Graphene

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
50	37	6	1182	250M	230/380/460	60	3	125.8/72.8/62.9
Enclosure	IP	Ins. Class	S.F.	Duty	Nom. Eff.	IEC Design	kVA Code	Ambient Temp. (°C)
TEFC	55	F (*)	1.15	S1	IE2-93.0	N	-	40
Locked Rotor Amps	Rotor Inertia (Kg-m2)	Torque						
		Full Load (N-m)	Locked Rotor (%)	Pull Up (%)	Break Down (%)			
503.2	1.2763	298.9	286.5	222.5	303.3			

Current vs Slip Curve and Torque vs Slip Curve

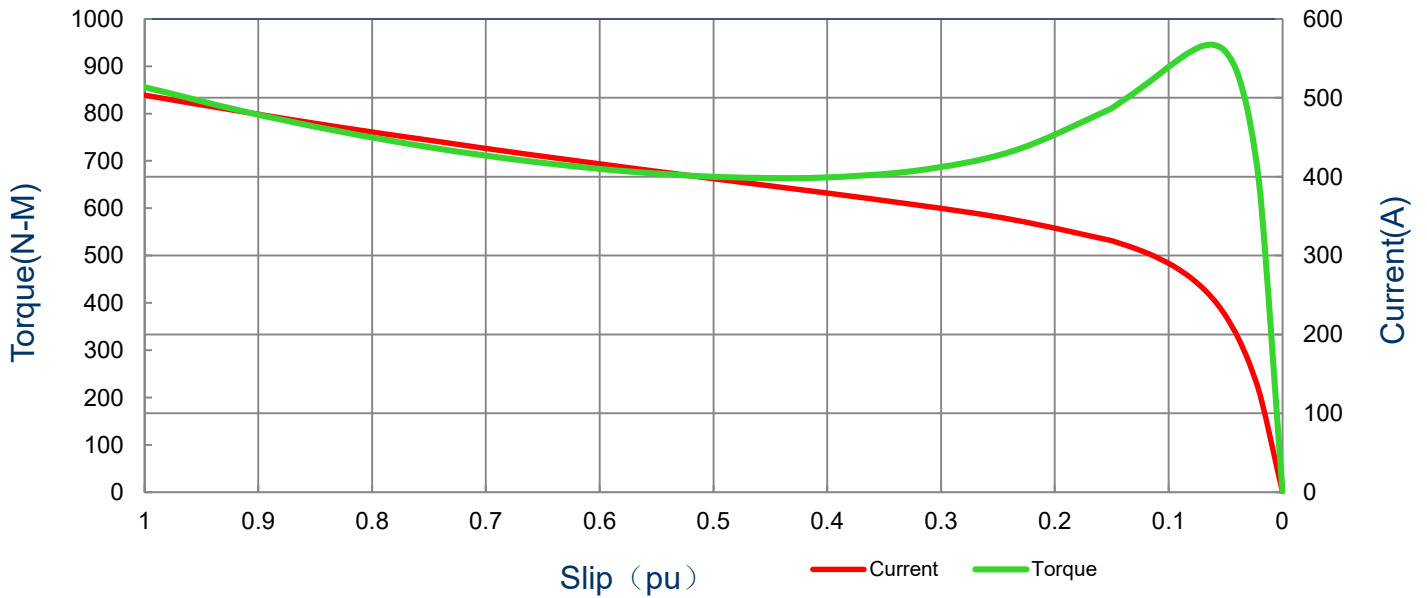

All characteristics are average expected values.

Engineering		Doc. Written By		Doc.# / Rev	MEGP00376D2TBL
Engr. Date		Doc. Approved By		Doc. Issued	

Issued Date	11/14/2022	Doc. #	382-R0
Issued By	LD	Issued Rev	0


Motor Connection Diagram

Model: MEGP00376D2TBL

Serie: IEC Graphene


HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
50	37	6	1182	250M	230/380/460	60	3	125.8/72.8/62.9
Enclosure	IP	Ins. Class	S.F.	Duty	Nom. Eff.	IEC Design	kVA Code	Ambient Temp. (°C)
TEFC	55	F (*)	1.15	S1	IE2-93.0	N	-	40

12 Leads Connection Diagram

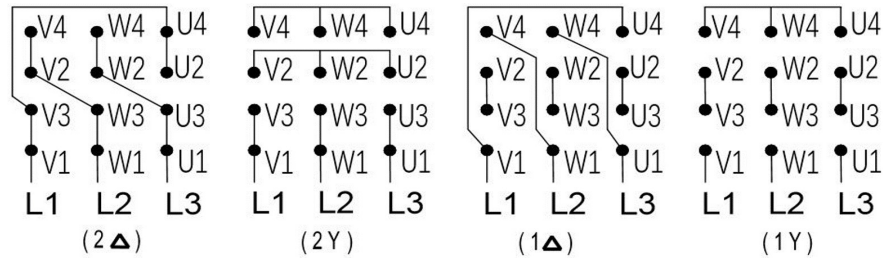

Y- Only Start

PTC Diagram



All characteristics are average expected values.

Engineering		Doc. Written By		Doc.# / Rev	MEGP00376D2TBL
Engr. Date		Doc. Approved By		Doc. Issued	

